



LED PANELS



Page 28




LED PANELS
600×600

Page 29




LED PANELS
1200×300

Page 30



FRAMES AND SUSPENDING
ACCESSORIES

Page 31



LED PANELS, ROUND

Page 34



LED PANELS, SQUARE

Page 36



FRAMES
FOR SURFACE MOUNTING

Page 36




LED PANELS
FOR SURFACE MOUNTING

Page 37



LED GLASS PANELS,
ROUND

Page 38



LED GLASS PANELS,
SQUARE

UltraLux®

LED PANELS 600×600



UltraLux®




LED PANEL 600×600 WITH HIGH EFFICIENCY



Product No.	Power	Colour temperature	Luminous flux	Cat. No.
LPH664040	40 W	4000 K	4200 lm	03168
LPH664055	40 W	5500 K	4200 lm	03169

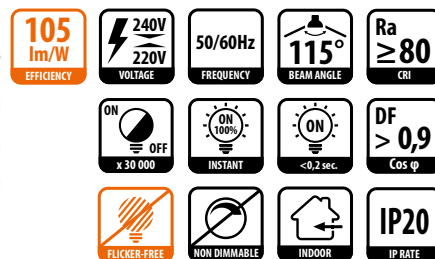



External non-dimmable driver included
Option for dimming with Ultralux® dimmable drivers

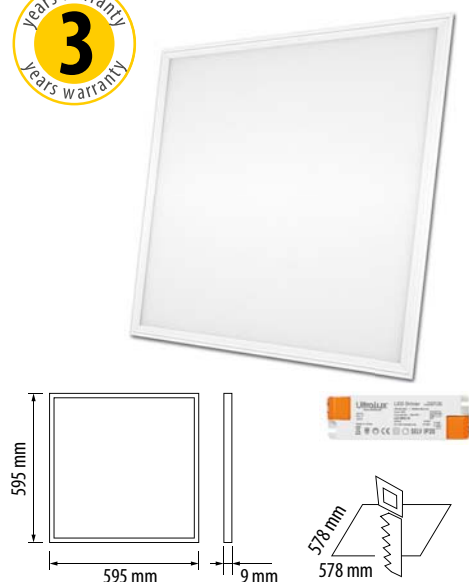


LED PANEL 600×600



Product No.	Power	Colour temperature	Luminous flux	Cat. No.
LP664042	40 W	4200 K	3700 lm	03163
LP664060	40 W	6000 K	3700 lm	03164

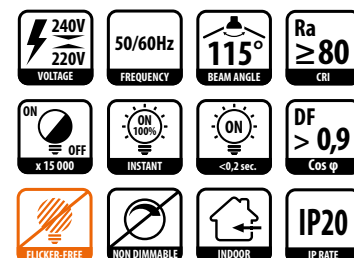



External non-dimmable driver included
Option for dimming with Ultralux® dimmable drivers

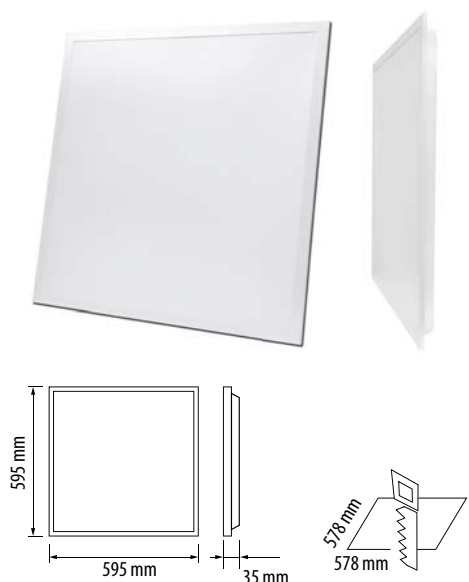

LED PANEL 600×600



Product No.	Power	Colour temperature	Luminous flux	Cat. No.
LPB664042	40 W	4000 K	4000 lm	03170
LPB664055	40 W	5500 K	4000 lm	03171

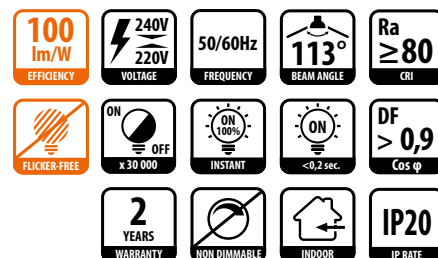

Non-dimmable built-in driver included


LED PANELS 600×600, 1200×300

Ultralux®

LED PANELS


CE

3 years warranty

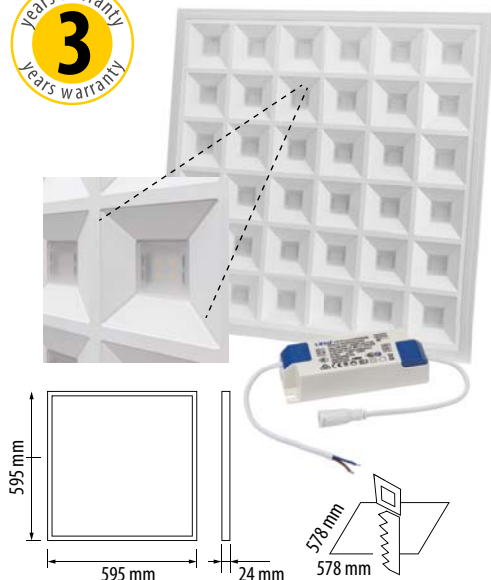


LED PANEL 600×600 LOW GLARE

Product No.	Power	Colour temperature	Luminous flux	Cat. No.
LPNG664040	40 W	4000 K	4800 lm	03172




External non-dimmable driver included
Option for dimming with Ultralux® dimmable drivers

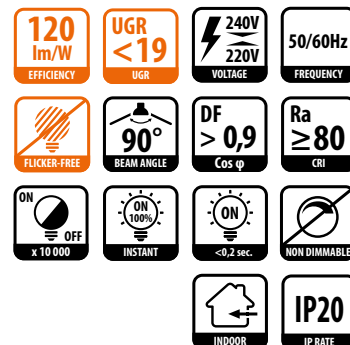


CE

3 years warranty

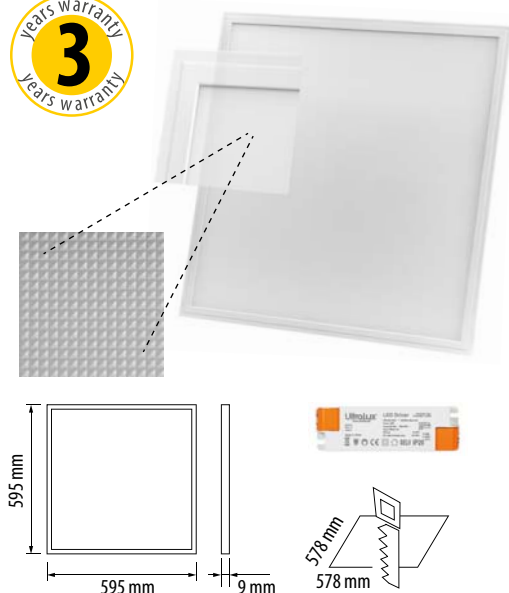


LED PANEL 600×600 LOW GLARE

Product No.	Power	Colour temperature	Luminous flux	Cat. No.
LPLG664042	40 W	4200 K	4000 lm	03165




External non-dimmable driver included
Option for dimming with Ultralux® dimmable drivers

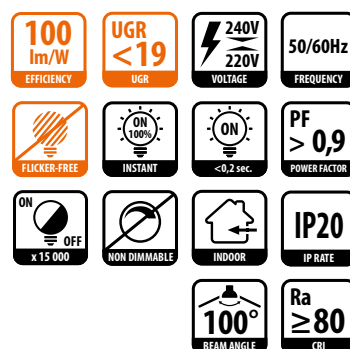



CE

3 years warranty

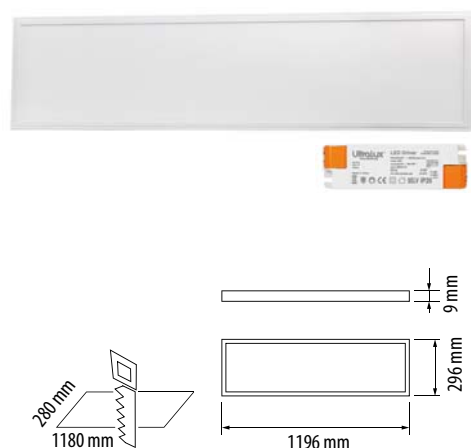

LED PANEL 1200×300

Product No.	Power	Colour temperature	Luminous flux	Cat. No.
LP1234042	40 W	4200 K	3700 lm	03162
LP1234060	40 W	6000 K	3700 lm	03182

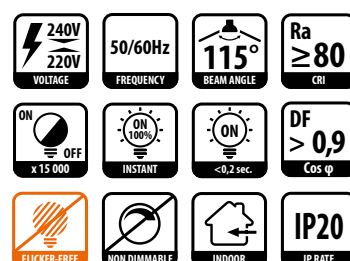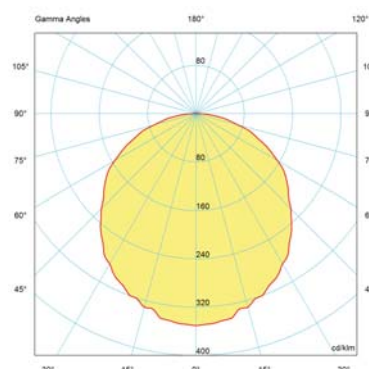


External non-dimmable driver included
Option for dimming with Ultralux® dimmable drivers

FRAMES AND SUSPENDING ACCESSORIES



FRAME FOR SURFACE MOUNTING OF LED PANEL 600×600




Product No.	Cat. No.
-------------	----------

FSM662	03176
--------	-------

Material: Aluminium
Corner polycarbonate connectors
Colour: White




FRAME FOR BUILDING-IN OF LED PANEL 600×600




Product No.	Cat. No.
-------------	----------

RV66	03080
------	-------

Material: Galvanized steel
Colour: White



FRAME FOR SURFACE MOUNTING OF LED PANEL 1200×300




Product No.	Cat. No.
-------------	----------

FSM1232	03178
---------	-------

Material: Aluminium
Corner polycarbonate connectors
Colour: White




FRAME FOR BUILDING-IN OF LED PANEL 1200×300



Product No.	Cat. No.
-------------	----------

RV123	03166
-------	-------

Material: Galvanized steel
Colour: White

SUSPENDING ACCESSORIES
FOR LED PANELS AND PROFILES

Product No.	Cat. No.
-------------	----------

KELP82	03002
--------	-------

Material: Galvanized steel
Length of the suspending wires: 82cm
4 pcs. in a set

METAL SPRING CLIPS
FOR LED PANELS

Product No.	Cat. No.
-------------	----------

SCLP4	03181
-------	-------

Material: Galvanized steel
4 pcs. in a set

LED PANELS, ROUND

UltraLux®




LED PANEL FOR BUILDING-IN WITH ADJUSTABLE BRACKETS FOR MOUNTING, ROUND



Product No.	Power	Colour temperature	Luminous flux	Cat. No.
LPRA2442	24 W	4200 K	2520 lm	03174

Built-in non-dimmable driver included
Housing: PBT
Diffuser: PC




LED PANEL FOR BUILDING-IN WITH ADJUSTABLE BRACKETS FOR MOUNTING, ROUND



Product No.	Power	Colour temperature	Luminous flux	Cat. No.
LPRA1842	18 W	4200 K	1890 lm	03175

Built-in non-dimmable driver included
Housing: PBT
Diffuser: PC




LED PANEL FOR BUILDING-IN, ROUND



Product No.	Power	Colour temperature	Luminous flux	Cat. No.
LPRB2442	24 W	4200 K	2000 lm	03127

External non-dimmable driver included
Housing: PBT
Diffuser: PS



LED PANELS, ROUND

UltraLux®



LED PANEL FOR BUILDING-IN, ROUND*


F A T G

Product No.	Power	Colour temperature	Luminous flux	Cat. No.
LPRB1827	18 W	2700 K	1450 lm	03128
LPRB1842	18 W	4200 K	1500 lm	03129


External non-dimmable driver included

Housing: PBT

Diffuser: PS



*Option for surface mounting with frame FPR18



LED PANEL FOR BUILDING-IN, ROUND*


F A T G

Product No.	Power	Colour temperature	Luminous flux	Cat. No.
LPRB1242	12 W	4200 K	1000 lm	03131


External non-dimmable driver included

Housing: PBT

Diffuser: PS



*Option for surface mounting with frame FPR12



LED PANEL FOR BUILDING-IN, ROUND



F A T G

Product No.	Power	Colour temperature	Luminous flux	Cat. No.
LPRB642	6 W	4200 K	500 lm	03133

External non-dimmable driver included

Housing: PBT

Diffuser: PS



LED PANELS, ROUND

Ultralux®

LED PANELS




LED PANEL FOR BUILDING-IN, ROUND



Product No.	Power	Colour temperature	Luminous flux	Cat. No.
LPABS627W	6 W	2700 K	400 lm	03045

External non-dimmable driver included

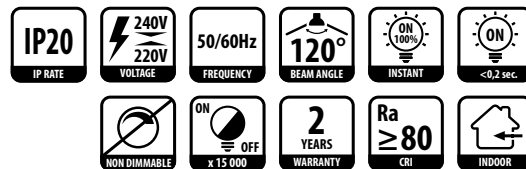

Housing: Aluminium
Diffuser: PS
White frame




LED PANEL FOR BUILDING-IN, ROUND




Product No.	Power	Colour temperature	Luminous flux	Cat. No.
LPABS627G	6 W	2700 K	400 lm	03047

External non-dimmable driver included

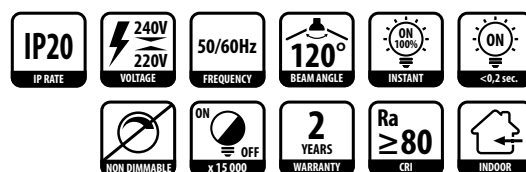

Housing: Aluminium
Diffuser: PS
Green frame

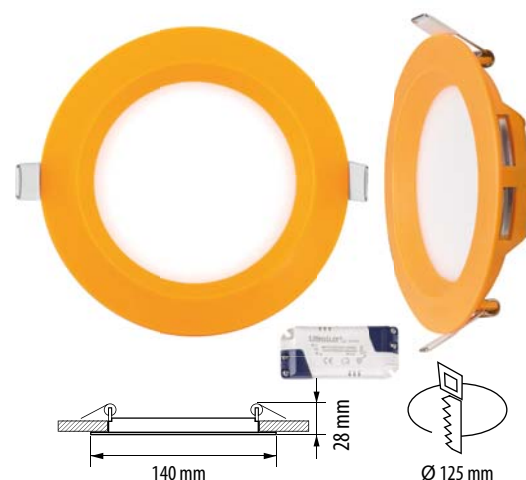


LED PANEL FOR BUILDING-IN, ROUND



Product No.	Power	Colour temperature	Luminous flux	Cat. No.
LPABS627O	6 W	2700 K	400 lm	03049
LPABS642O	6 W	4200 K	400 lm	03050

External non-dimmable driver included

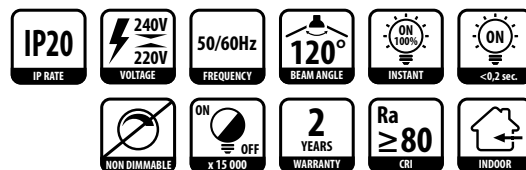

Housing: Aluminium
Diffuser: PS
Orange frame




LED PANEL FOR BUILDING-IN, ROUND



Product No.	Power	Colour temperature	Luminous flux	Cat. No.
LPABS627Y	6 W	2700 K	400 lm	03051
LPABS642Y	6 W	4200 K	400 lm	03052

External non-dimmable driver included

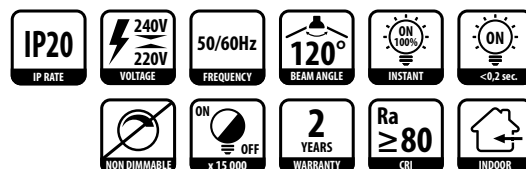

Housing: Aluminium
Diffuser: PS
Yellow frame

LED PANELS, SQUARE

UltraLux®






LED PANEL FOR BUILDING-IN, SQUARE



F A G

Product No.	Power	Colour temperature	Luminous flux	Cat. No.
LPSB2442	24 W	4200 K	2000 lm	03167




Non-dimmable built-in driver included
Housing: PBT
Diffuser: PS



LED PANEL FOR BUILDING-IN, SQUARE

Product No.	Power	Colour temperature	Luminous flux	Cat. No.
LPSB2251827	18 W	2700 K	1500 lm	03004

Non-dimmable built-in driver included
Housing: Aluminium
Diffuser: PS



LED PANEL FOR BUILDING-IN, SQUARE*

F A G

Product No.	Power	Colour temperature	Luminous flux	Cat. No.
LPSB1842	18 W	4200 K	1500 lm	03135

Non-dimmable built-in driver included
Housing: PBT
Diffuser: PS

*Option for surface mounting with frame FPS18



LED PANELS, SQUARE

UltraLux®



LED PANEL FOR BUILDING-IN, SQUARE*




Product No.	Power	Colour temperature	Luminous flux	Cat. No.
LPSB1242	12 W	4200 K	1000 lm	03137

Non-dimmable built-in driver included

Housing: PBT

Diffuser: PS

*Option for surface mounting with frame FPS12



LED PANEL FOR BUILDING-IN, SQUARE





Product No.	Power	Colour temperature	Luminous flux	Cat. No.
LPSB642	6 W	4200 K	500 lm	03139

Non-dimmable built-in driver included

Housing: PBT

Diffuser: PS

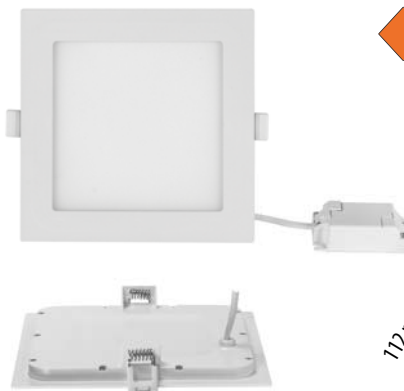

LED PANEL FOR BUILDING-IN, SQUARE




Product No.	Power	Colour temperature	Luminous flux	Cat. No.
LPSB105642	6 W	4200 K	400 lm	03044

Non-dimmable built-in driver included

Housing: Aluminium

Diffuser: PS




FRAMES FOR SURFACE MOUNTING

UltraLux®

FRAME FOR SURFACE MOUNTING
OF LED PANEL 18W, ROUND


Product No.	Cat. No.
FPR18	03140

For LED panel with Product No.
LPRB1827 and LPRB1842
Material: PBT

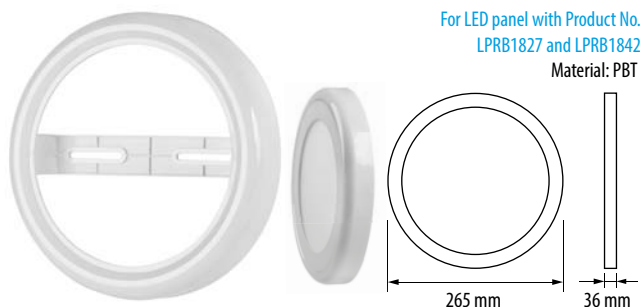FRAME FOR SURFACE MOUNTING
OF LED PANEL 12W, ROUND


Product No.	Cat. No.
FPR12	03141

For LED panel
with Product No. LPRB1242
Material: PBT

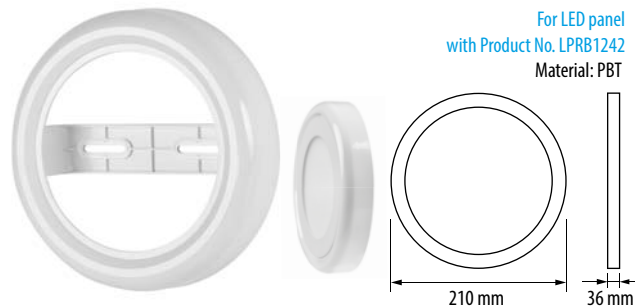FRAME FOR SURFACE MOUNTING
OF LED PANEL 18W, SQUARE


Product No.	Cat. No.
FPS18	03142

For LED panel
with Product No. LPSB1842
Material: PBT

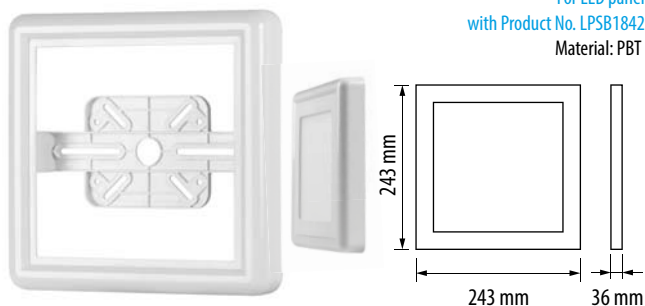FRAME FOR SURFACE MOUNTING
OF LED PANEL 12W, SQUARE

Product No.	Cat. No.
FPS12	03143

For LED panel
with Product No. LPSB1242
Material: PBT

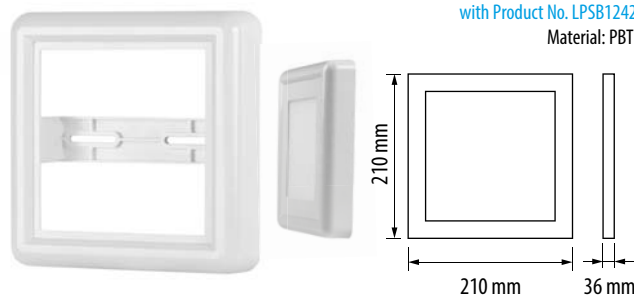

LED PANELS FOR SURFACE MOUNTING




LED PANEL FOR SURFACE MOUNTING, ROUND

Product No.	Power	Colour temperature	Luminous flux	Cat. No.
LPRS1801227	12 W	2700 K	900 lm	03032
LPRS1801242	12 W	4200 K	900 lm	03033



External non-dimmable
driver included
Housing: Aluminium
Diffuser: PS



LED PANELS FOR SURFACE MOUNTING

UltraLux®



LED PANEL FOR SURFACE MOUNTING, SQUARE



Product No.	Power	Colour temperature	Luminous flux	Cat. No.
LPSS2251827	18 W	2700 K	1500 lm	03026

External non-dimmable driver included
Housing: Aluminium
Diffuser: PS



LED GLASS PANELS, ROUND



LED GLASS PANEL FOR BUILDING-IN, WATERPROOF, ROUND



Product No.	Power	Colour temperature	Luminous flux	Cat. No.
LPRG1842	18 W	4200 K	1300 lm	03144

External non-dimmable driver included
Housing: Aluminium
Diffuser: Glass, PS



LED GLASS PANEL FOR BUILDING-IN, WATERPROOF, ROUND



Product No.	Power	Colour temperature	Luminous flux	Cat. No.
LPRG1242	12 W	4200 K	920 lm	03145

External non-dimmable driver included
Housing: Aluminium
Diffuser: Glass, PS



LED GLASS PANELS, ROUND


UltraLux®



LED GLASS PANEL FOR BUILDING-IN, ROUND

Product No.	Power	Colour temperature	Luminous flux	Cat. No.
LPRG16351242	12 W	4200 K	900 lm	03023



External non-dimmable driver included
Housing: Aluminium
Diffuser: Glass, PS

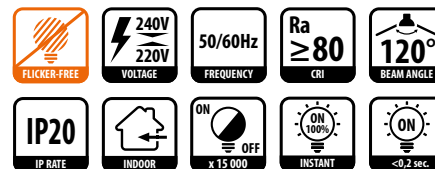

LED GLASS PANEL FOR BUILDING-IN, WATERPROOF, ROUND

Product No.	Power	Colour temperature	Luminous flux	Cat. No.
LPRG627	6 W	2700 K	420 lm	03146
LPRG642	6 W	4200 K	420 lm	03147

External non-dimmable driver included
Housing: Aluminium
Diffuser: Glass, PS

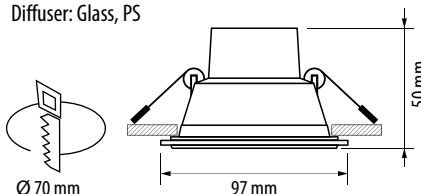



LED GLASS PANELS, SQUARE



LED GLASS PANEL FOR BUILDING-IN, SQUARE

Product No.	Power	Colour temperature	Luminous flux	Cat. No.
LPSG20351842	18 W	4200 K	1500 lm	03007

External non-dimmable driver included
Housing: Aluminium
Diffuser: Glass, PS



LED GLASS PANELS, SQUARE



Ultralux®



LED GLASS PANEL FOR BUILDING-IN, WATERPROOF, SQUARE

Product No.	Power	Colour temperature	Luminous flux	Cat. No.
LPSG1842	18 W	4200 K	1300 lm	03148



External non-dimmable driver included
Housing: Aluminium
Diffuser: Glass, PS

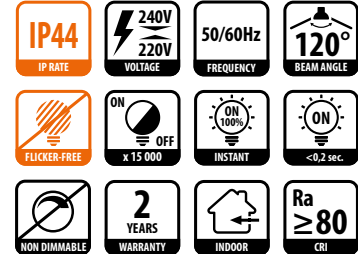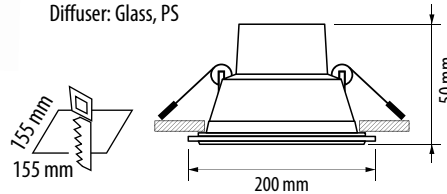

LED GLASS PANEL FOR BUILDING-IN, WATERPROOF, SQUARE

Product No.	Power	Colour temperature	Luminous flux	Cat. No.
LPSG1242	12 W	4200 K	920 lm	03149

External non-dimmable driver included
Housing: Aluminium
Diffuser: Glass, PS

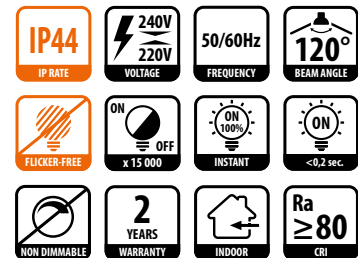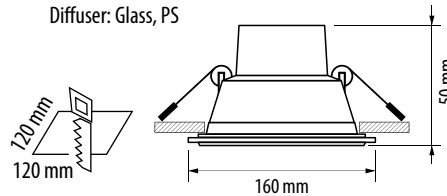

LED GLASS PANEL FOR BUILDING-IN, WATERPROOF, SQUARE

Product No.	Power	Colour temperature	Luminous flux	Cat. No.
LPSG627	6 W	2700 K	420 lm	03150
LPSG642	6 W	4200 K	420 lm	03151

External non-dimmable driver included
Housing: Aluminium
Diffuser: Glass, PS

