




CEILING LAMPS



Page 50

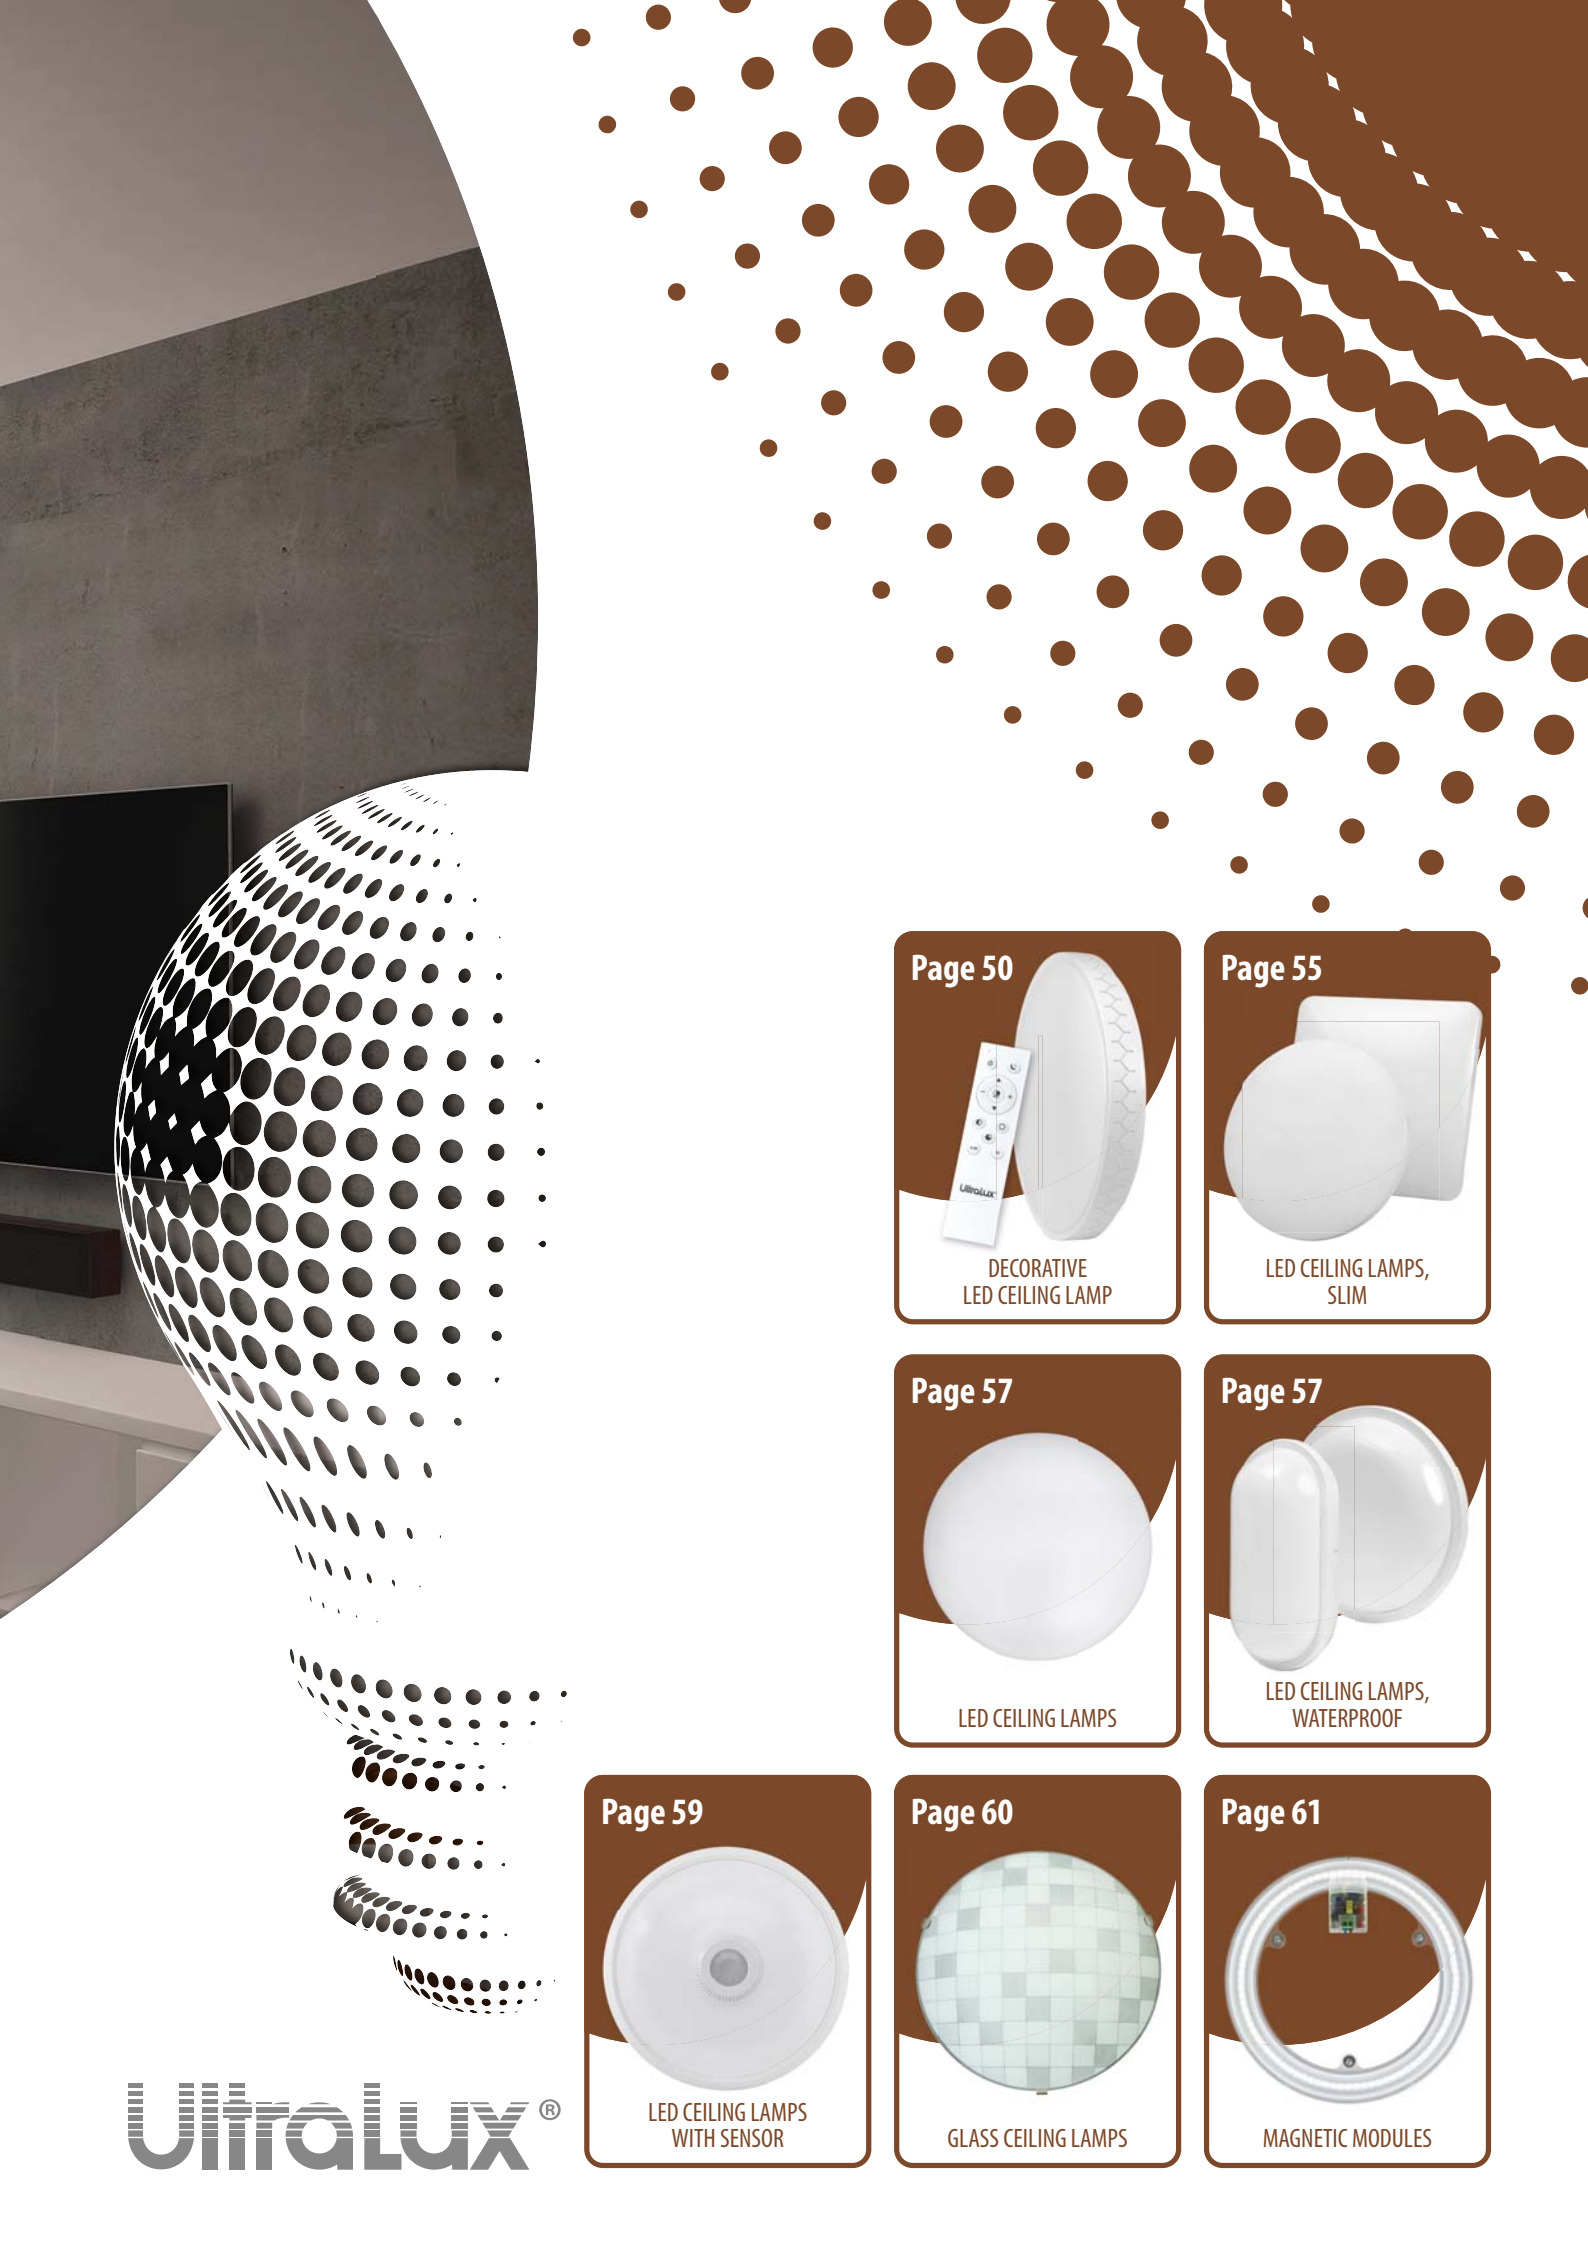

DECORATIVE
LED CEILING LAMP

Page 55



LED CEILING LAMPS,
SLIM

Page 57



LED CEILING LAMPS

Page 57



LED CEILING LAMPS,
WATERPROOF

Page 59



LED CEILING LAMPS
WITH SENSOR

Page 60



GLASS CEILING LAMPS

Page 61



MAGNETIC MODULES

UltraLux®



DECORATIVE LED CEILING LAMP

UltraLux®

LED DIMMABLE / CCT CHANGE CEILING LAMP WITH DECORATIVE PERIPHERY



| Product No. | Voltage | Power | Colour temperature | Luminous flux | Cat. No. |
|-------------|----------------|-------|----------------------|---------------|----------|
| SPLF6042RC | 220 - 240 V AC | 60 W | 3000 K/4200 K/6500 K | 4200 lm | 11160 |

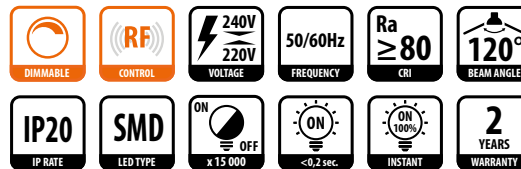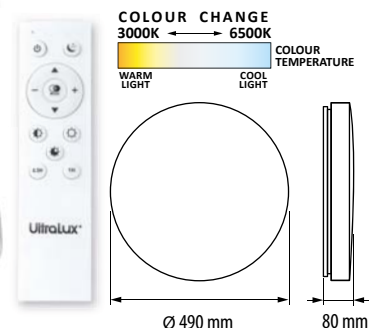

Smooth dimming and CCT adjustment by RF remote control

Housing: Powder coated steel



Diffuser: PVC

Optics: PMMA lenses

LED CEILING LAMP WITH DECORATIVE PERIPHERY, ROUND



| Product No. | Voltage | Power | Colour temperature | Luminous flux | Cat. No. |
|-------------|----------------|-------|--------------------|---------------|----------|
| SPLF2442 | 220 - 240 V AC | 24 W | 4200 K | 1700 lm | 11161 |

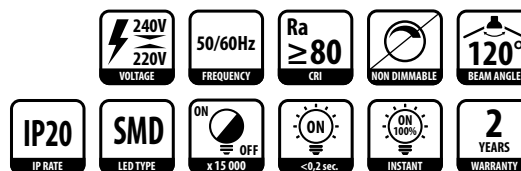

Housing: Powder coated steel



Diffuser: PVC

Optics: PMMA lenses

LED DIMMABLE / CCT CHANGE CEILING LAMP WITH DECORATIVE RING



| Product No. | Voltage | Power | Colour temperature | Luminous flux | Cat. No. |
|-------------|----------------|-------|----------------------|---------------|----------|
| SPLG6042RC | 220 - 240 V AC | 60 W | 3000 K/4200 K/6500 K | 4200 lm | 11152 |

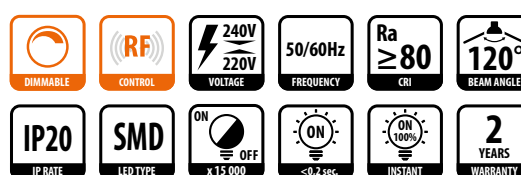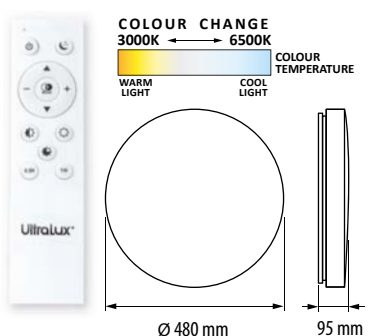

Smooth dimming and CCT adjustment by RF remote control

Housing: Powder coated steel

Diffuser: PVC

Optics: PMMA lenses

DECORATIVE LED CEILING LAMP



UltraLux®



LED CEILING LAMP WITH DECORATIVE RING, ROUND



| Product No. | Voltage | Power | Colour temperature | Luminous flux | Cat. No. |
|-------------|----------------|-------|--------------------|---------------|----------|
| SPLG4842 | 220 - 240 V AC | 48 W | 4200 K | 3400 lm | 11153 |

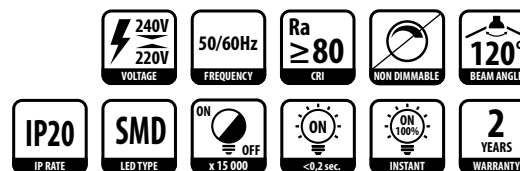



Housing: Powder coated steel
Diffuser: PVC
Optics: PMMA lenses



LED CEILING LAMP WITH DECORATIVE RING, ROUND



| Product No. | Voltage | Power | Colour temperature | Luminous flux | Cat. No. |
|-------------|----------------|-------|--------------------|---------------|----------|
| SPLG3642 | 220 - 240 V AC | 36 W | 4200 K | 2600 lm | 11154 |
| SPLG2442 | 220 - 240 V AC | 24 W | 4200 K | 1700 lm | 11156 |

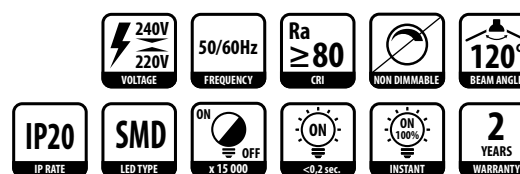



Housing: Powder coated steel
Diffuser: PVC
Optics: PMMA lenses



DECORATIVE LED CEILING LAMP, ROUND



| Product No. | Voltage | Power | Colour temperature | Luminous flux | Cat. No. |
|-------------|----------------|-------|--------------------|---------------|----------|
| SPLV2840 | 220 - 240 V AC | 28 W | 4000 K | 2000 lm | 11155 |
| SPLV2440 | 220 - 240 V AC | 24 W | 4000 K | 1650 lm | 11157 |

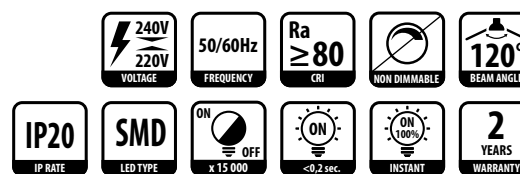


Housing: Powder coated steel
Diffuser: PVC
Optics: PMMA lenses

DECORATIVE LED CEILING LAMP


UltraLux®



DECORATIVE LED CEILING LAMP, ROUND




| Product No. | Voltage | Power | Colour temperature | Luminous flux | Cat. No. |
|-------------|----------------|-------|--------------------|---------------|----------|
| SPLV1840 | 220 - 240 V AC | 18 W | 4000 K | 1200 lm | 11158 |

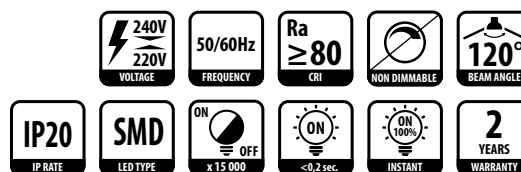


Housing: Powder coated steel
Diffuser: PVC
Optics: PMMA lenses



DECORATIVE LED CEILING LAMP, ROUND




| Product No. | Voltage | Power | Colour temperature | Luminous flux | Cat. No. |
|-------------|----------------|-------|--------------------|---------------|----------|
| SPLV1240 | 220 - 240 V AC | 12 W | 4000 K | 800 lm | 11159 |

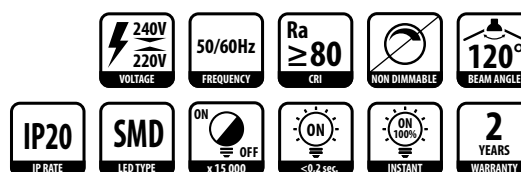


Housing: Powder coated steel
Diffuser: PVC
Optics: PMMA lenses



DECORATIVE LED CEILING LAMP, ROUND



| Product No. | Voltage | Power | Colour temperature | Luminous flux | Cat. No. |
|-------------|----------------|-------|--------------------|---------------|----------|
| SPLD3640 | 220 - 240 V AC | 36 W | 4000 K | 2700 lm | 11114 |

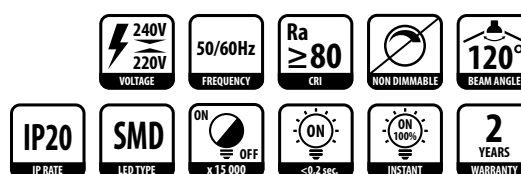

Housing: Powder coated steel
Diffuser: PVC
Optics: PMMA lenses



DECORATIVE LED CEILING LAMP

UltraLux®



DECORATIVE LED CEILING LAMP, ROUND

| Product No. | Voltage | Power | Colour temperature | Luminous flux | Cat. No. |
|-------------|----------------|-------|--------------------|---------------|----------|
| SPLD2840 | 220 - 240 V AC | 28 W | 4000 K | 2000 lm | 11104 |
| SPLD2440 | 220 - 240 V AC | 24 W | 4000 K | 1650 lm | 11106 |

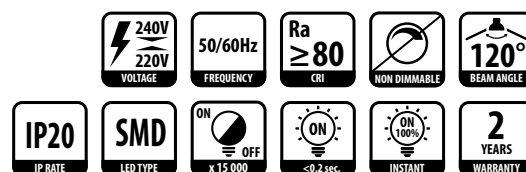



Housing: Powder coated steel
Diffuser: PVC
Optics: PMMA lenses



DECORATIVE LED CEILING LAMP, ROUND

| Product No. | Voltage | Power | Colour temperature | Luminous flux | Cat. No. |
|-------------|----------------|-------|--------------------|---------------|----------|
| SPLD1840 | 220 - 240 V AC | 18 W | 4000 K | 1200 lm | 11109 |

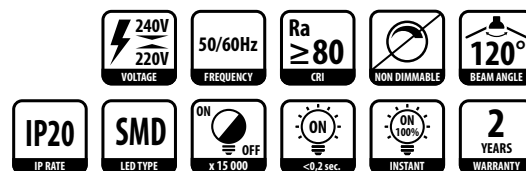



Housing: Powder coated steel
Diffuser: PVC
Optics: PMMA lenses



DECORATIVE LED CEILING LAMP, ROUND

| Product No. | Voltage | Power | Colour temperature | Luminous flux | Cat. No. |
|-------------|----------------|-------|--------------------|---------------|----------|
| SPLD1227 | 220 - 240 V AC | 12 W | 2700 K | 800 lm | 11110 |
| SPLD1240 | 220 - 240 V AC | 12 W | 4000 K | 800 lm | 11111 |

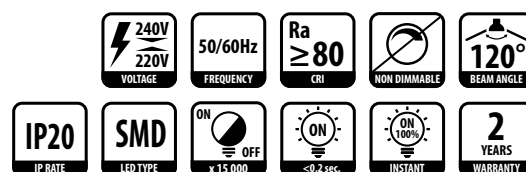

Housing: Powder coated steel
Diffuser: PVC
Optics: PMMA lenses



DECORATIVE LED CEILING LAMP

UltraLux®




DECORATIVE LED CEILING LAMP, SQUARE

| Product No. | Voltage | Power | Colour temperature | Luminous flux | Cat. No. |
|-------------|----------------|-------|--------------------|---------------|----------|
| SPLDS2442 | 220 - 240 V AC | 24 W | 4200 K | 1550 lm | 11118 |

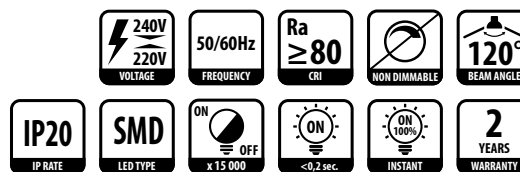



Housing: Powder coated steel
Diffuser: PVC

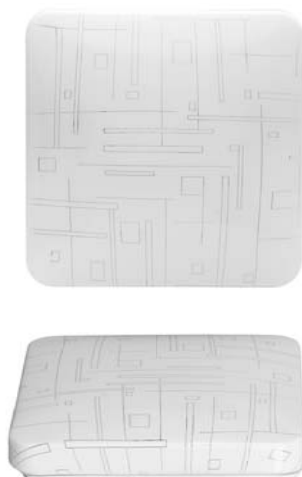

DECORATIVE LED CEILING LAMP, SQUARE

| Product No. | Voltage | Power | Colour temperature | Luminous flux | Cat. No. |
|-------------|----------------|-------|--------------------|---------------|----------|
| SPLDS1842 | 220 - 240 V AC | 18 W | 4200 K | 1160 lm | 11119 |

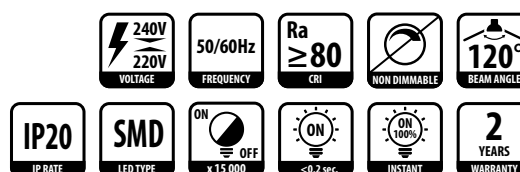



Housing: Powder coated steel
Diffuser: PVC



DECORATIVE LED CEILING LAMP, SQUARE

| Product No. | Voltage | Power | Colour temperature | Luminous flux | Cat. No. |
|-------------|----------------|-------|--------------------|---------------|----------|
| SPLDS1242 | 220 - 240 V AC | 12 W | 4200 K | 750 lm | 11120 |

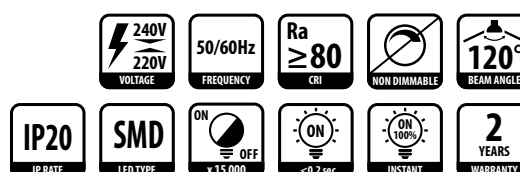


Housing: Powder coated steel
Diffuser: PVC



SLIM LED CEILING LAMP, ROUND

| Product No. | Voltage | Power | Colour temperature | Luminous flux | Cat. No. |
|-------------|----------------|-------|--------------------|---------------|----------|
| SPL2442R | 220 - 240 V AC | 24 W | 4200 K | 1500 lm | 11136 |



Housing: Powder coated steel


Diffuser: PVC

Optics: PMMA lenses



SLIM LED CEILING LAMP, ROUND

| Product No. | Voltage | Power | Colour temperature | Luminous flux | Cat. No. |
|-------------|----------------|-------|--------------------|---------------|----------|
| SPL1842R | 220 - 240 V AC | 18 W | 4200 K | 1200 lm | 11137 |



Housing: Powder coated steel


Diffuser: PVC

Optics: PMMA lenses



SLIM LED CEILING LAMP, ROUND

| Product No. | Voltage | Power | Colour temperature | Luminous flux | Cat. No. |
|-------------|----------------|-------|--------------------|---------------|----------|
| SPL1242R | 220 - 240 V AC | 12 W | 4200 K | 800 lm | 11138 |



Housing: Powder coated steel

Diffuser: PVC

Optics: PMMA lenses





LED CEILING LAMPS, SLIM

UltraLux®



SLIM LED CEILING LAMP, SQUARE

| Product No. | Voltage | Power | Colour temperature | Luminous flux | Cat. No. |
|-------------|---------------|-------|--------------------|---------------|----------|
| SPL2442S | 220 -240 V AC | 24 W | 4200 K | 1500 lm | 11133 |

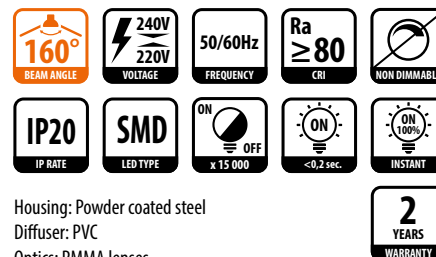



Housing: Powder coated steel
Diffuser: PVC
Optics: PMMA lenses



SLIM LED CEILING LAMP, SQUARE

| Product No. | Voltage | Power | Colour temperature | Luminous flux | Cat. No. |
|-------------|---------------|-------|--------------------|---------------|----------|
| SPL1842S | 220 -240 V AC | 18 W | 4200 K | 1200 lm | 11134 |

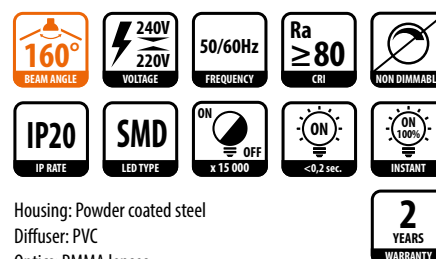



Housing: Powder coated steel
Diffuser: PVC
Optics: PMMA lenses



SLIM LED CEILING LAMP, SQUARE

| Product No. | Voltage | Power | Colour temperature | Luminous flux | Cat. No. |
|-------------|---------------|-------|--------------------|---------------|----------|
| SPL1242S | 220 -240 V AC | 12 W | 4200 K | 800 lm | 11135 |

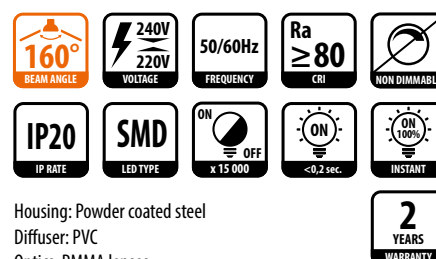


Housing: Powder coated steel
Diffuser: PVC
Optics: PMMA lenses

LED CEILING LAMPS


UltraLux®



LED CEILING LAMP, ROUND



| Product No. | Voltage | Power | Colour temperature | Luminous flux | Cat. No. |
|-------------|----------------|-------|--------------------|---------------|----------|
| SPL1240 | 220 - 240 V AC | 12 W | 4000 K | 800 lm | 11100 |

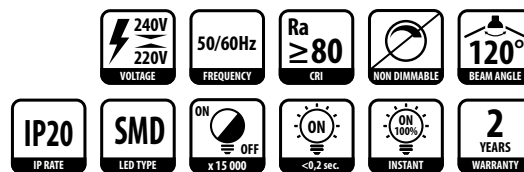


Housing: Powder coated steel
Diffuser: PVC
Optics: PMMA lenses


LED CEILING LAMPS, WATERPROOF



LED CEILING LAMPS, WATERPROOF, ROUND




| Product No. | Voltage | Power | Colour temperature | Luminous flux | Cat. No. |
|-------------|----------------|-------|--------------------|---------------|----------|
| LBH2442R | 220 - 240 V AC | 24 W | 4200 K | 1850 lm | 11141 |

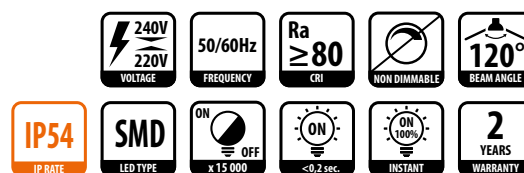


Housing: PBT
Diffuser: PC



LED CEILING LAMPS, WATERPROOF, OVAL



| Product No. | Voltage | Power | Colour temperature | Luminous flux | Cat. No. |
|-------------|----------------|-------|--------------------|---------------|----------|
| LBH2442E | 220 - 240 V AC | 24 W | 4200 K | 1850 lm | 11142 |

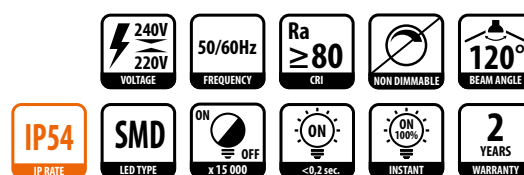

Housing: PBT
Diffuser: PC

LED CEILING LAMPS, WATERPROOF

UltraLux®




LED CEILING LAMP, WATERPROOF, ROUND




G A ↑ G

| Product No. | Voltage | Power | Colour temperature | Luminous flux | Cat. No. |
|-------------|----------------|-------|--------------------|---------------|----------|
| LBH1442R | 220 - 240 V AC | 14 W | 4200 K | 1200 lm | 11139 |



IP44
IP RATE

Housing: PBT
Diffuser: PC

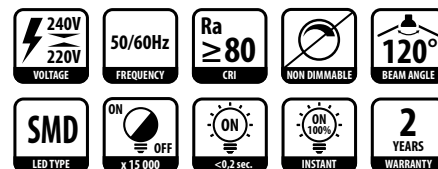


LED CEILING LAMP, WATERPROOF, ROUND




F A ↑ G

| Product No. | Voltage | Power | Colour temperature | Luminous flux | Cat. No. |
|-------------|----------------|-------|--------------------|---------------|----------|
| LBH1042R | 220 - 240 V AC | 10 W | 4200 K | 800 lm | 11140 |



IP44
IP RATE

Housing: PBT
Diffuser: PC

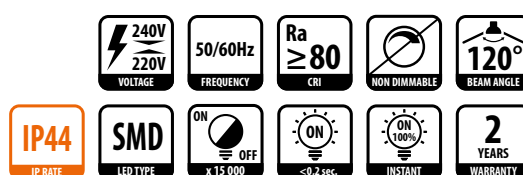


LED CEILING LAMP, WATERPROOF, OVAL




G A ↑ G

| Product No. | Voltage | Power | Colour temperature | Luminous flux | Cat. No. |
|-------------|----------------|-------|--------------------|---------------|----------|
| LBH1042BL | 220 - 240 V AC | 10 W | 4200 K | 700 lm | 11126 |

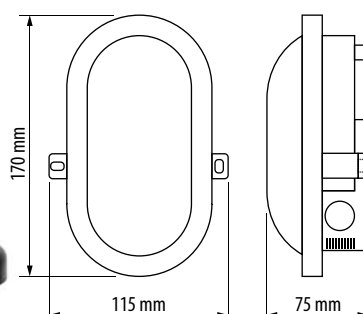

IP44
IP RATE

Housing: PBT
Diffuser: PC

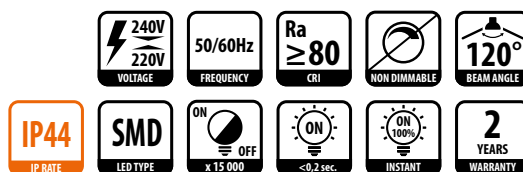

LED CEILING LAMPS WITH SENSOR


UltraLux®

CEILING LAMPS




LED PIR CEILING LAMP, ROUND


| Product No. | Voltage | Power | Colour temperature | Luminous flux | Cat. No. |
|-------------|----------------|-------|--------------------|---------------|----------|
| SPLP1642 | 220 - 240 V AC | 16 W | 4200 K | 1150 lm | 11162 |



Housing: ABS
Diffuser: PC
Adjustable time delay
and ambient light threshold.




Detection distance: max. 3 m
Mounting height: 2.2-4.0 m
Ambient light threshold: 3-2000 lx
Time delay: 10 sec-3 min

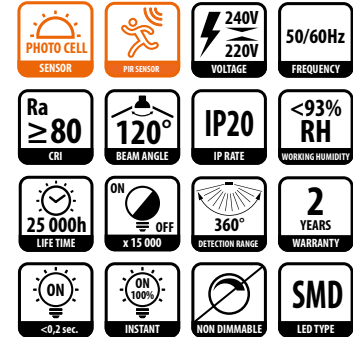


LED CEILING LAMP WITH MICROWAVE SENSOR, ROUND


| Product No. | Voltage | Power | Colour temperature | Luminous flux | Cat. No. |
|-------------|----------------|-------|--------------------|---------------|----------|
| SPLS1240 | 220 - 240 V AC | 12 W | 4000 K | 800 lm | 11117 |



Housing: Powder coated steel
Diffuser: PVC
Adjustable time delay, ambient light threshold
and detection distance.




Detection distance: 2-8 m
Mounting height: 1.5-3.5 m (wall mounting), 2-8 m (ceiling mounting)
Ambient light threshold: 10-2000 lx
Time delay: 5 sec-10 min

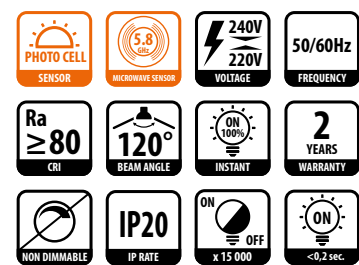


LED CEILING LAMP WITH MICROWAVE DIMMING SENSOR, SQUARE


| Product No. | Voltage | Power | Colour temperature | Luminous flux | Cat. No. |
|-------------|----------------|-------|--------------------|---------------|----------|
| SPLM1240D | 220 - 240 V AC | 12 W | 4000 K | 850 lm | 11143 |



Housing: PBT
Diffuser: PC
Adjustable Time delay,
ambient light threshold
and detection distance.
2 dimming levels: 10% / 20%
Soft dimming function



Detection distance: 5-15 m (wall mounting), 2-8 m (ceiling mounting)
Mounting height: 1.5-3.5 m (wall mounting), 2-4 m (ceiling mounting)
Detection range: 180°/360°
Ambient light threshold: 5/15/50/2000 lx
Operating time at full power: 10 sec/90 sec/3 min/10 min

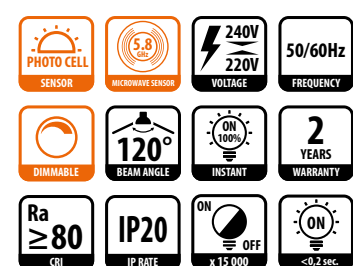


LED CEILING LAMPS WITH SENSOR

UltraLux®




CEILING LAMP WITH PIR MOTION SENSOR, 2×E27, ROUND


| Product No. | Voltage | Power | Base | Luminous flux | Cat No. |
|-------------|----------------|------------|-------|---------------|---------|
| SPLP2E27 | 220 - 240 V AC | max. 2×12W | 2×E27 | - | 11163 |



Housing: Powder coated steel
Diffuser: PC
Ceramic lamp holders
Adjustable time delay,
ambient light threshold
and detection distance.




Detection distance: max. 3 m
Mounting height: 2.2-4.0 m
Ambient light threshold: 3-2000 lx
Time delay: 10 sec-3 min
Detection range: 360°



GLASS CEILING LAMPS

GLASS CEILING LAMP, ROUND, E14


| Product No. | Voltage | Power | Base | Luminous flux | Cat No. |
|-------------|----------------|----------|------|---------------|---------|
| GPLE14C55 | 220 - 240 V AC | max.40 W | E14 | - | 11146 |



Housing: Powder coated steel
Diffuser: Glass

GLASS CEILING LAMP, ROUND, E14

| Product No. | Voltage | Power | Base | Luminous flux | Cat No. |
|-------------|----------------|-----------|------|---------------|---------|
| GPLE14L11 | 220 - 240 V AC | max. 40 W | E14 | - | 11147 |



Housing: Powder coated steel
Diffuser: Glass

GLASS CEILING LAMPS


UltraLux®



GLASS CEILING LAMP, ROUND, E14



| Product No. | Voltage | Power | Base | Luminous flux | Cat No. |
|-------------|----------------|---------|------|---------------|---------|
| GPLE14S33 | 220V - 240V AC | max.40W | E14 | - | 11148 |




Housing: Powder coated steel
Diffuser: Glass



GLASS CEILING LAMP, ROUND, E27



| Product No. | Voltage | Power | Base | Luminous flux | Cat No. |
|-------------|--------------|-----------|------|---------------|---------|
| GPLE27S88 | 220-240 V AC | max. 60 W | E27 | - | 11151 |




Housing: Powder coated steel
Diffuser: Glass



GLASS CEILING LAMP, ROUND



| Product No. | Voltage | Power | Base | Luminous flux | Cat No. |
|-------------|----------------|----------|------|---------------|---------|
| GPLE27R | 220 - 240 V AC | 60 W max | E27 | - | 11131 |



Housing: Powder coated steel
Diffuser: Glass


MAGNETIC MODULES



F A G MAGNETIC LED MODULE FOR CEILING LAMPS



| Product No. | Voltage | Power | Colour temperature | Luminous flux | Cat No. |
|-------------|--------------|-------|--------------------|---------------|---------|
| LMM1842 | 220-240 V AC | 18 W | 4200 K | 1700 lm | 11462 |



Protective PC cover.
Option for magnetic mounting.