



## **LED FLOODLIGHTS**



**UltraLux**<sup>®</sup>

**Page 186**



PROFESSIONAL SERIES

**Page 187**



LOW GLARE FLOODLIGHTS

**Page 188**



SLIM SERIES

**Page 189**



LED PIR FLOODLIGHTS



PROFESSIONAL LED FLOODLIGHT

Product No.	Power	DF	Colour temperature	Luminous flux	Weight	Cat. No.
SPG20050	200 W	0.9	5000 K	24000 lm	5.00 kg	02056
SPG15050	150 W	0.9	5000 K	18000 lm	5.00 kg	02057
SPG10050	100 W	0.9	5000 K	12000 lm	3.15 kg	02058
SPG5050	50 W	0.9	5000 K	6000 lm	1.20 kg	02059



SPG5050



SPG10050




SPG15050





SPG20050

120 lm/W  
Breathing valve

Housing: Aluminium  
Prismatic tempered glass diffuser  
Cable: 1 m H05RNF 3G 1.0 mm  
(included in the set)

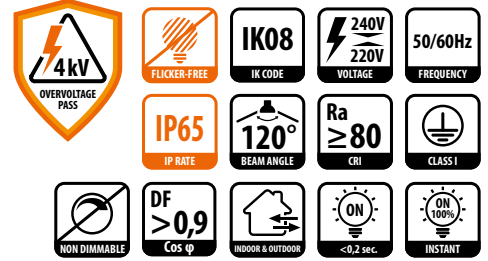

Fast connection cable gland

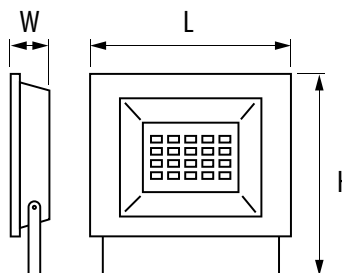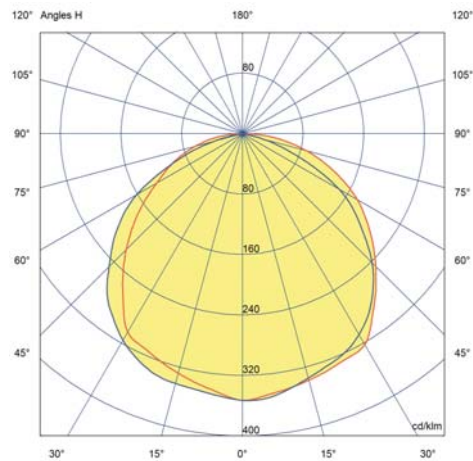

SPG20050 - L 410 / H 385 / W 95 mm  
 SPG15050 - L 410 / H 385 / W 95 mm  
 SPG10050 - L 330 / H 320 / W 80 mm  
 SPG5050 - L 180 / H 290 / W 55 mm



# PROFESSIONAL SERIES




Fast connection cable gland



## PROFESSIONAL LED FLOODLIGHT 12-24 V DC




Product No.	Power	Colour temperature	Luminous flux	Weight	Cat. No.
SPG125050	50 W	5000 K	6000 lm	1.2 kg	02064

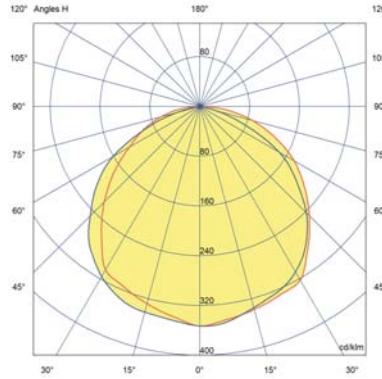

120 lm/W  
Breathing valve

Housing: Aluminium  
Prismatic tempered glass diffuser  
Cable: 1 m H05RNF 3G 1.0 mm (included in the set)

- IP65 IP RATE
- FLICKER-FREE
- 24V DC 12V VOLTAGE
- IK08 IK CODE
- NON DIMMABLE
- 120° BEAM ANGLE
- Ra ≥ 80 CRI
- INDOOR & OUTDOOR
- ON 100%
- <0.2 sec.
- INSTANT

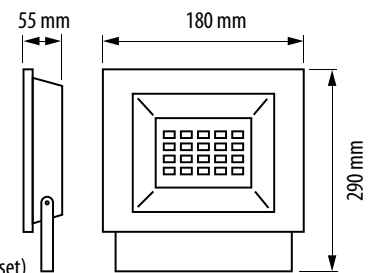

# LOW GLARE FLOODLIGHTS




## LED FLOODLIGHT, LOW GLARE



Product No.	Power	DF	Colour temperature	Luminous flux	Cat. No.
SPA5042	50 W	>0.9	4200 K	4000 lm	02065
SPA3042	30 W	>0.9	4200 K	2500 lm	02066
SPA2042	20 W	>0.7	4200 K	1600 lm	02067
SPA1042	10 W	>0.7	4200 K	800 lm	02068

Low glare  
Cable: 60 cm, white  
Housing: Aluminium, white  
Diffuser: Frameless, opal polycarbonate

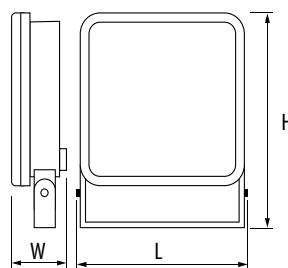

- FLICKER-FREE
- IP65 IP RATE
- 240V 220V VOLTAGE
- 50/60Hz FREQUENCY
- NON DIMMABLE
- 120° BEAM ANGLE
- Ra ≥ 80 CRI
- CLASS I
- 2 ГОДИНИ ГАРАНЦИЯ
- INDOOR & OUTDOOR
- ON 100%
- <0.2 sec.
- INSTANT

SPA5042 - L 173 / H 235 / W 53 mm  
SPA3042 - L 146 / H 205 / W 49 mm  
SPA2042 - L 115 / H 157 / W 44 mm  
SPA1042 - L 95 / H 131 / W 40 mm

## SLIM SERIES

UltraLux®

CE



## SLIM LED FLOODLIGHT




Product No.	Power	DF	Colour temperature	Luminous flux	Cat. No.
SPD10060	100 W	>0.9	6000 K	8000 lm	02047
SPD5042	50 W	>0.9	4200 K	4000 lm	02048
SPD5060	50 W	>0.9	6000 K	4000 lm	02049
SPD3042	30 W	>0.9	4200 K	2500 lm	02050
SPD3060	30 W	>0.9	6000 K	2500 lm	02051
SPD2042	20 W	>0.7	4200 K	1600 lm	02052
SPD2060	20 W	>0.7	6000 K	1600 lm	02053
SPD1042	10 W	>0.7	4200 K	800 lm	02054
SPD1060	10 W	>0.7	6000 K	800 lm	02055


Cable: 60 cm, black

Housing: Aluminium

Prismatic tempered glass diffuser

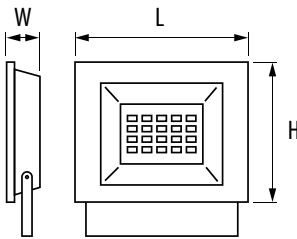

100 W	- L 265 / H 190 / W 50 mm
50 W	- L 175 / H 125 / W 46 mm
30 W	- L 175 / H 125 / W 37 mm
20 W	- L 138 / H 98 / W 35 mm
10 W	- L 110 / H 78 / W 35 mm

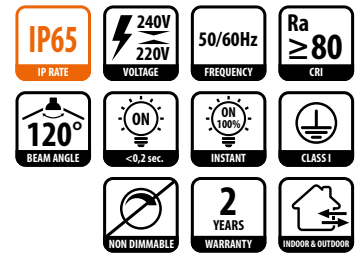





## LED FLOODLIGHT WITH PIR MOTION SENSOR



Product No.	Power	DF	Colour temperature	Luminous flux	Cat. No.
SPP45042	50 W	>0.9	4200 K	4000 lm	02060
SPP43042	30 W	>0.9	4200 K	2500 lm	02061
SPP42042	20 W	>0.7	4200 K	1600 lm	02062
SPP41042	10 W	>0.7	4200 K	800 lm	02063



Adjustable time delay and ambient light threshold  
 Rotatable sensor arm  
 Housing: Aluminium  
 Diffuser: Tempered glass  
 Cable: 60cm, black

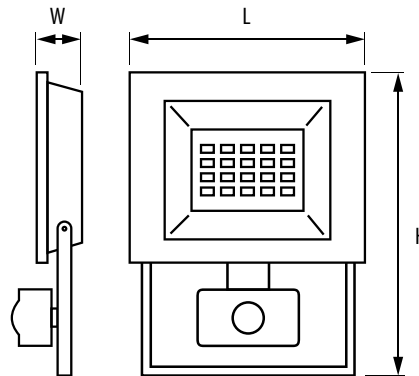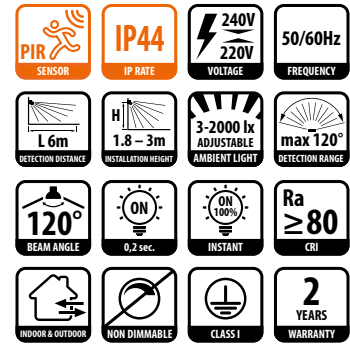

SPP45042 - L 175 / H 195 / W 68 mm  
 SPP43042 - L 175 / H 195 / W 60 mm  
 SPP42042 - L 138 / H 170 / W 55 mm  
 SPP41042 - L 110 / H 152 / W 55 mm